# **PCT**

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



Appl. No. 09/705,927 Doc. Ref. **AM1** 


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

		INDER THE PATENT COOPERATION TREATY (PCI)
(51) International Patent Classification 6:		(11) International Publication Number: WO 99/22322
G06F 17/60, 15/02	A1	(43) International Publication Date: 6 May 1999 (06.05.99)
(21) International Application Number: PCT/USS (22) International Filing Date: 23 October 1998 (2)		DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,
(30) Priority Data: 60/063,164 60/064,986 60/058,613 24 October 1997 (24.10.97) 7 November 1997 (07.11.97) 10 April 1998 (10.04.98)	) 1	Published S With international search report. S S
<ul> <li>(71) Applicant: MICROSOFT CORPORATION [US/U Microsoft Way, Redmond, WA 98052-6399 (US).</li> <li>(72) Inventors: ULRICH, Bryce; 13105 N.E. 135th Street, I WA 98034 (US). DISCLOSO, Anthony; 3718 - 20 N.E., Redmond, WA 98053 (US). ALAM, Salin N.E. 91st Way, Redmond, WA 98052 (US).</li> <li>(74) Agents: KELLY, Joseph, R. et al.; Westman, Cha Kelly, P.A., International Centre - Suite 1600, 900 Avenue South, Minneapolis, MN 55402-3319 (US)</li> </ul>	Kirklar 4th Co n; 158 mplin O Seco	d, rt 13 8 8 8

(54) Title: ELECTRONIC MAIL OBJECT SYNCHRONIZATION BETWEEN A DESKTOP COMPUTER AND MOBILE DEVICE

#### (57) Abstract

A desktop computer (4) and a mobile device (3) both contain personal information management systems (5, 7), such as electronic mail applications. Objects maintained by the electronic mail applications are synchronized between the desktop computer (4) and the mobile device (3) such that attachments to electronic mail messages are receivable by the mobile device (3). The present invention also allows the user of the mobile device (3) to dynamically retreive individual electronic mail message attachments on a per message bassis. Further, filtering techniques can be implemented such that, during synchronization, only predetermined attachments are automatically provided to the electronic mail message object store (6) on the mobile device (3).

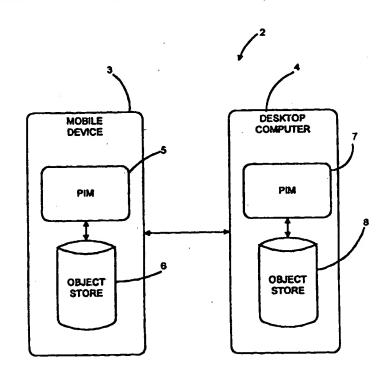

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

		`				~	m .	
AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia	
AM	Amenia	· FI	Finland	LT	Lithuania	SK	Slovakia	
AT	Austria	FR	Prance .	LU	Luxembourg	SN	Senegal	
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland	
AZ.	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad	
BA	Bosnia and Herzegovina	GB	Georgia	MD	Republic of Moldova	TG	Togo	
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan	
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan	
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey	
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago	
BJ	Benin	IB	Ireland	MN	Mongolia	UA	Ukraine	
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda	
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America	
CA	Canada	IT	Raly	MX	Mexico	ÚZ.	Uzbekistan	
CF	Central African Republic	JP	Japan	NB	Niger	VN	Viet Nam	
CG	Congo	KB	Kenya	NL	Netherlands	YU	Yugoslavia	
СН	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe	
a	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand			
CM	Cameroon		Republic of Korea	PL	Poland			
CN	China	KR	Republic of Korea	PŤ	Portugal			
CU	Cuba	KZ	Kazakstan	RO	Romania		•	
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation			
DE	Germany	u	Liechtenstein	SD	Sodan			
DK	Denmark	LK	Sri Lanka	SE	Sweden			
RR	Estonia	LR	Liberia	SG	Singapore			

-1-

# ELECTRONIC MAIL OBJECT SYNCHRONIZATION BETWEEN A DESKTOP COMPUTER AND MOBILE

#### **DEVICE**

## BACKGROUND OF THE INVENTION

Mobile devices are small electronic computing 5 devices often referred to as personal assistants. One such mobile device is the Handheld PC (or "H/PC") based on and including the Windows operating system sold by Microsoft Corporation 10 Redmond, Washington. While a wide variety computing tasks and applications can be performed by such mobile devices, personal information managers (PIMs) are particularly well suited to mobile devices.

PIMs typically comprise applications which enable the user of the mobile device to better manage scheduling and communications, and other such tasks. Some commonly available PIMs include scheduling and calendar programs, task lists, address books, and electronic mail (e-mail) programs. Some commonly commercially available PIMs are sold under the brand names Microsoft Schedule+ and Microsoft Outlook and are commercially available from Microsoft Corporation of Redmond, Washington.

15

20

25

30

It is also common for mobile devices to be used in conjunction with one or more desktop computers. For example, the user of a mobile device may also have access to, and use, a desktop computer at work, at home, or both. A user may typically run the same types of PIMs on both the desktop computer and the mobile device (although the particular versions of the PIMs may be somewhat different from the desktop computer to the mobile device). Thus, it is quite advantageous for the mobile device to be designed to

-2-

be coupleable to the desktop computer to exchange information with, and share information with, the mobile device.

The user may also typically make changes to the PIMs both on the mobile device, and at the desktop. Therefore, it is advantageous for the PIMs on both the mobile device and the desktop to contain the most upto-date information, regardless of whether recent changes to the PIMs have been made on the mobile device or the desktop computer. The process of coupling the mobile device with the desktop computer, and integrating the information stored by the PIMs on the mobile device and the desktop computer such that the two contain the same updated information is referred to as synchronization.

10

15

20

25

30

Conventional PIMs which support electronic mail messaging commonly provide the ability for the sender of an electronic mail message to electronically attach a document or other file to the electronic mail message such that the attachment is sent along with the electronic mail message to the recipient of the electronic mail message. Some prior mobile devices have been designed to allow the synchronization of electronic mail messages. However, to date, that synchronization has been directed to the electronic mail messages only, without the attachments. words, during synchronization of electronic messages, the attachments have conventionally been stripped out of the electronic mail transfer such that the user of the mobile device only receives the electronic mail message itself, with the attachments being stripped out of that message and inaccessible by the user of the mobile device.

number of significant obstacles present themselves dealing when with the transfer electronic mail messages in the environment which defines the interaction between the desktop computer and a mobile device. First, typical mobile devices have significantly limited amounts of memory relative to a desktop computer. Attachments supported by conventional PIMs may commonly not simply be text files, or documents, but may also be more memory intensive files, such as drawings, graphs, charts, and Therefore, synchronization of attachments to electronic mail messages presents difficult questions with respect to memory capacity. Also, providing an adequate electronic mail address book dominating mobile device memory presents problems.

10

15

20

25

30

Further, many attachments may be unneeded by the user of the mobile device, unless the user is at the desktop. In other words, the user may not desire to (and indeed may have no use to) observe many attachments, unless the user is at the desktop where the user can view the attachments and act on the attachments in that environment.

In addition, some users may receive electronic mail messages from sources which the user does not desire to synchronize with the desktop computer. For example, if the ability were provided to couple the mobile device to more than one other computing device, the user may not wish to synchronize all information on both other computing devices and the mobile device. Thus, appropriate discrimination among messages presents problems as well.

#### SUMMARY OF THE INVENTION

One aspect of the present invention arises, at

least in part, from the notion that some users find it highly desirable to view all attachments, or at least some attachments received along with electronic mail messages at the desktop computer. In addition, the present invention arises, at least in part, from the notion that it may be desirable for the user of the mobile device to receive only certain attachments to electronic mail messages, chosen by the user dynamically on an ad hoc basis, or chosen according to preselectable filtering criteria.

A desktop computer and a mobile device both contain personal information management systems, such as electronic mail applications. Objects in the electronic mail applications are synchronized between the desktop computer and the mobile device such that attachments to electronic mail messages are viewable by the mobile device.

10

20

25

30

While using the mobile device's electronic mail application, the user is able to request individual attachments that have not been downloaded to the from the desktop computer. During synchronization, a change in the electronic mail message object on the mobile device, which reflects the user's desire to obtain an attachment on the mobile device, is detected by the desktop computer. response, a synchronization component on the computer manipulates an application programming interface which controls access to the electronic mail message object store on the desktop computer to retrieve the identified attachment. synchronization component then manipualtes a remote application programming interface, utilized by object store on the mobile device, to transfer the

10

identified attachment to the electronic mail message object store on the mobile device.

Another aspect of the present invention allows the user of the mobile device to dynamically retrieve individual electronic mail message attachments on a per message basis. Further, filtering techniques can be implemented such that, during synchronization, only predetermined attachments are automatically provided to the electronic mail message object store on the mobile device.

Another feature of the present configures the electronic mail messaging application mobile device to utilize an application programming interface to retrieve address information from an abridged directory on the mobile device. 15 Further, the mobile device can be configured to employ the same resolution features associated with the desktop computer such that familiar names can be used address messages at the mobile device in 20 efficient manner. The present invention also provides synchronization architecture which alleviates unwanted integration of electronic mail messages, such as integration of electronic mail messages from two or more other computing devices which are couplable to 25 the mobile device.

## BRIEF DESCRIPTION OF THE DRAWINGS

- FIG. 1 is a block diagram illustrating a basic environment of the present invention.
- FIG. 2 is a block diagram of one embodiment of a conventional desktop computer used in conjunction with a mobile device in accordance with the present invention.
  - FIG. 3 is a simplified pictorial illustration of

one embodiment of a mobile device in accordance with the present invention.

FIG. 4 is a simplified block diagram of one embodiment of the mobile device shown in FIG. 3.

5

10

30

FIG. 5 is an architectural block diagram illustrating one embodiment of portions of the desktop computer shown in FIG. 2 and the mobile device shown in FIGS. 3 and 4 to illustrate synchronization of information stored in object stores on the desktop computer and the mobile device in accordance with the present invention.

FIG. 5A illustrates one embodiment of a user interface in accordance with the present invention.

FIG. 6 is a flow diagram illustrating the 15 transfer of attachments in accordance with one embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is a block diagram of a typical system or environment 2 in which the present invention operates.

20 Environment 2 includes mobile device 3 and desktop computer 4. Mobile device 3 includes an application program 5 and an object store 6. Desktop computer 4 also includes an application program 7 and an object store 8. Mobile device 3 and desktop computer 4 are connectable by one of a plurality of connection mechanisms 9.

FIG. 2 and the related discussion are intended to provide a brief, general description of a suitable desktop computer 4 in which portions of the invention may be implemented. Although not required, the invention will be described, at least in part, in the general context of computer-executable instructions, such as program modules, being executed by a personal

computer 4 or mobile device 3. Generally, program modules include routine programs, objects, components, data structures, etc. that perform particular tasks or implement particular abstract data types. those skilled in the art will appreciate that desktop computer 4 may be implemented with other computer system configurations, including multiprocessor systems, microprocessor-based or programmable consumer electronics, network PCs, minicomputers, computers, and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. distributed computing environment, program modules may be located in both local and remote memory storage devices.

10

15

20

25

30

With reference to FIG. 2, an exemplary system for implementing desktop computer 4 includes a general purpose computing device in the form of a conventional personal computer 4, including processing unit 21, a system memory 22, and a system bus 23 that couples various system components including the system memory to the processing unit 21. The system bus 23 may be any of several types of bus structures including a memory bus or memory controller, a peripheral bus, and local bus using any of а variety architectures. The system memory includes read only memory (ROM) 24 a random access memory (RAM) 25. basic input/output system (BIOS) 26, containing the basic routine that helps to transfer information between elements within the desktop computer 4, such as during start-up, is stored in ROM 24. The desktop computer 4 further includes a hard disk drive 27 for

-8-

reading from and writing to a hard disk (not shown) a magnetic disk drive 28 for reading from or writing to removable magnetic disk 29, and an optical disk drive 30 for reading from or writing to a removable optical disk 31 such as a CD ROM or other optical media. hard disk drive 27, magnetic disk drive 28, optical disk drive 30 are connected to the system bus 23 by a hard disk drive interface 32, magnetic disk drive interface 33, and an optical drive interface 34, respectively. The drives and the associated computerreadable media provide nonvolatile storage of computer readable instructions, data structures, program modules and other data for the desktop computer 4.

10

15

20

25

30

Although the exemplary environment described herein employs a hard disk, a removable magnetic disk 29 and a removable optical disk 31, it should be appreciated by those skilled in the art that other types of computer readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks (DVDs), Bernoulli cartridges, random access memories (RAMs), read only memory (ROM), and the like, may also be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk, magnetic disk 29, optical disk 31, ROM 24 or RAM 25, including an operating system 35, one or more application programs 36 (which include PIMs 7), other program modules 37, and program data 38. A user may enter commands and information into the desktop computer 4 through input devices such as a keyboard 40, pointing device 42 and microphone 62. Other input devices (not shown) may include a joystick, game pad, satellite dish, scanner, or the like. These and other

-9-

input devices are often connected to the processing unit 21 through a serial port interface 46 that is coupled to the system bus 23, but may be connected by other interfaces, such as a sound card, a parallel 5 port, game port or a universal serial bus (USB). monitor 47 or other type of display device is also connected to the system bus 23 via an interface, such as a video adapter 48. In addition to the monitor 47, desktop computers may typically include other peripheral output devices such as speaker 45 and printers.

10

15

20

25

30

The desktop computer 4 may operate in a networked environment using logic connections to one or more remote computers (other than mobile device 3), such as a remote computer 49. The remote computer 49 may be another personal computer, a server, a router, network PC, a peer device or other network node, and typically includes many or all of the elements described above relative to desktop computer although only a memory storage device 50 has been illustrated in FIG. 2. The logic connections depicted in FIG. 2 include a local area network (LAN) 51 and a wide area network (MAN) 52. Such networking environments are commonplace in offices, enterprisewide computer network intranets and the Internet.

When used in a LAN networking environment, the desktop computer 4 is connected to the local area network 51 through a network interface or adapter 53. When used in a WAN networking environment, desktop computer 4 typically includes a modem 54 or other means for establishing communications over the wide area network 52, such as the Internet. 54, which may be internal or external, is connected to - WO 99/22322 PCT/US98/22384\_

the system bus 23 via the serial port interface 46. In a network environment, program modules depicted relative to desktop computer 4, or portions thereof, may be stored in the remote memory storage devices.

It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

10

15

20

25

30

Desktop computer 4 runs operating system 35 that is typically stored in non-volatile memory 24 and executes on the processor 21. One suitable operating system is a Windows brand operating system sold by Microsoft Corporation, such as Windows 95 or Windows NT, operating systems, other derivative versions of Windows brand operating systems, or another suitable operating system. Other suitable operating systems include systems such as the Macintosh OS sold from Apple Corporation, and the OS/2 Presentation Manager sold by International Business Machines (IBM) Armonk, New York. PIM 7 is preferably stored in program module 37, in volatile memory or non-volatile memory; or can be loaded into any of the components shown in FIG. 2 from a floppy diskette 29, CDROM drive 31, downloaded from a network via network adapter 53, or loaded using another suitable mechanism.

A dynamically linked library (DLL), comprising a plurality of executable functions is associated with PIM 7 for execution by processor 21. Interprocessor and intercomponent calls are facilitated preferably using the component object model (COM) as is common in programs written for MICROSOFT WINDOWS brand operating systems. Briefly, when using COM, a software component such as a DLL has a number of interfaces. Each interface exposes a plurality of methods, which

can be called individually to utilize different services offered by the software component. addition, interfaces are provided such that methods or functions can be called from other software components which optionally receive and return one or more parameter arguments.

In general, the DLL associated with PIM 7 is designed specifically to work in conjunction with PIM 7 and to expose desktop synchronization interfaces that function according to a synchronization protocol. The DLL, in turn, calls interfaces exposed by PIM 7 in order to access data representing individual properties of objects maintained in object store 8. Object store 8, of course, can reside in any one of the suitable memory components described with respect to FIG. 2.

10

15

20

30

FIG. is a pictorial illustration of preferred embodiment of a mobile device 3 which can be used in accordance with the present invention. Mobile device 3, in one preferred embodiment, is a desktop assistant sold under the designation Handheld PC or H/PC based on a Windows CE operating system provided by Microsoft Corporation. Mobile device 3 has some components which are similar to those of desktop 25 · computer 4. For. instance, in one preferred embodiment, mobile device 3 includes a miniaturized keyboard 82, display 84, and stylus 86.

In the embodiment shown in FIG. 3, display 84 is a contact sensitive liquid crystal display screen which is used in conjunction with stylus 86. Stylus 86 is used to press or contact the display screen 84 at designated coordinates to accomplish certain user input functions. Of course, other user

input configurations can be used as well. For example, user input mechanisms could be included such as a keypad, a track ball, and other various types of miniaturized keyboards, or the like. In addition, mobile device 3 may not be embodied as the H/PC brand of desktop assistant, but could also be implemented as another type of personal digital assistant (PDA), another personal organizer, a palm top computer, or a similar computerized device.

10 FIG. 4 is a more detailed block diagram of mobile device Mobile device 3 preferably includes microprocessor 88. memory 90, input/output (I/O) components 92 (which include keyboard 82 and touch sensitive screen 84) and serial interface 94. In the preferred embodiment, these components of 15 mobile device 3 are coupled for communication with another over a suitable bus 96.

preferred embodiment, memory 90 is implemented as non-volatile electronic memory such as a random access memory (RAM) and read only memory (ROM) with a battery back-up module (not shown) such that information stored in memory 90 is not lost when the general power to mobile device 30 is shut down. portion of memory 90 is preferably allocated as addressable memory for program execution, another portion of memory 90 is preferably used to simulate storage on a disk drive.

20

25

30

Memory 90 includes operating system 98 and application (or PIM) 5. Operating system 98, during operation, is preferably loaded into, and executed by, processor 88 from memory 90. Operating system 98, in one preferred embodiment, is the Windows CE brand operating system commercially available from Microsoft

Corporation. The operating system 98 is preferably designed for mobile devices, and implements database features which can be utilized by PIM 5 through a set of exposed application programming interfaces and methods. The objects in object store 6 are preferably maintained by PIM 5 and operating system 98, at least partially in response to calls to the exposed application program interfaces and methods.

It should be noted that PIM 5 is not necessarily designed to be entirely compatible with PIM 7 which executes on desktop computer 4. For instance, there may not be the precise one-to-one matching between the properties of specific object types. Some properties supported by the electronic mail messaging features of PIM 5 may have no corresponding features in PIM 7 on desktop computer 4, and vise versa.

10

15

20

25

an architectural block diagram illustrating one preferred embodiment of architectural components of mobile device 3 and desktop computer 4 which are used in synchronizing objects stored in object store 6 on mobile device 3 and object store 8 on desktop computer 4. In addition to PIM 5 and object store 6, mobile device 3 includes synchronization interface 100, component synchronization manager 102, communications component 94, remote application programming interface (RAPI) server 116, and electronic mail messaging transports 132, 134 and 136.

Desktop computer 4 includes, in addition to PIM 7 and object store 8, synchronization interface component 108, synchronization manager 110, reference store 112, RAPI component 114, and communications component 115. Many of the components shown in FIG. 5

are used primarily to implement a suitable synchronization protocol. For the sake of simplicity, one suitable protocol is discussed in this application. Other protocols could be used as well.

5 Generally, synchronization manager 110 executes on desktop computer 4 and orchestrates synchronization between objects in object store 6 in handheld device 3, and objects in object store 8 in desktop computer 4. Synchronization manager 110 also maintains reference store 112 apart from desktop object store 8 10 described in greater detail below. Synchronization manager 110 implements synchronization protocol to allow a comparison between corresponding objects stored in object store 6 15 mobile device 3 and object store 8 in desktop computer 4, to receive objects from object store 8, and to update objects in object store 8. The synchronization protocol also facilitates the retrieval of objects stored in object store 6 in mobile device 3 through 20 synchronization interface component synchronization manager 102, as well as communications component 94.

On the side of mobile device synchronization interface component 100 exposes application programming interfaces which synchronization manager 102 calls to read and store objects and object properties on object store 6. general, the application programming interfaces allow the creation of databases for different types objects, and allow application programs to write and read property names and values to and from respective objects within object store 6.

25

30

As discussed with respect to FIG. 1, PIM 5

executes on mobile device 3 and maintains object store 6. PIM 7 executes on desktop computer 4 and maintains object store 8. There are many different ways which PIMs 5 and 7 can store objects in object stores 6 and 8. However, in a preferred embodiment, PIMs 5 and 7 create a distinct database for each object type. For example, different databases are created for appointments, tasks, electronic mail messages, etc. A predefined set of properties is supported for each object type, and each of the databases is assigned a name by the application program that creates it.

In an alternative embodiment, the application programs in PIMs 5 and 7 may use a single database for all object types, with the first property of each object defining the type of object. In any case, objects are uniquely identified within mobile device 3 and desktop computer 4 by object identifiers which are independent of the names assigned by the application programs creating the object.

20 Synchronization manager 110 is not necessarily closely associated with PIM 7. Rather, it is an independent component which synchronizes objects from any application program that supports the appropriate desktop synchronization interfaces. Communication components 94 and 115 implement serial communications between the computers using suitable link 9.

Synchronization manager 110 communicates with PIM 7 and accesses object store 8 through synchronization interface component 108. Synchronization interface component 108 corresponds generally to a DLL discussed with respect to FIG. 2 above, and exposes one or more application program interfaces and methods. The interfaces and methods are preferably of the form

30

known as store interfaces such as IreplStore and IreplObjHandler developed and published by the Microsoft Corporation for WINDOWS brand operating system platforms. Those interfaces may, in turn, use interfaces such as messaging application programming interfaces (MAPI) and/or OLE Automation (or any other application programming interface) to communicate with the underlying PIM and object store. In one preferred embodiment, the MAPI exposed by component 108 is a C-10 language application programming interface allows programmable access to features of electronic mail messaging program known as MS Mail also commercially available from the Microsoft In another preferred embodiment, Corporation. MAPI exposed by component 108 is a component object - 15 model based (COM-based) set of interfaces which is sometimes referred to as extended MAPI and includes a set of automation interfaces to messaging systems, for in Visual Basic and the like. However. 20 synchronization interface component 108 and associated application program interfaces and methods can be any suitable synchronization components designed for any particular application in Because the application program interfaces are 25. preferably standardized, they allow synchronization manager 110 to access and synchronize any number of different desktop PIMs, as long as the required interface methods are implemented for each PIM.

Reference store 112 provides a mapping between 30 instances of objects stored in object store 6 on mobile device 3 and objects stored in object store 8 on desktop computer 4. Since the same object identifiers are not used by PIM 5 to identify objects

on object store 6 as are used by PIM 7 to identify objects in object store 8, this mapping is required.

Synchronization manager 110 maintains reference store 112 so that reference store 112 contains the identifying data segments corresponding respectively to a plurality of object instances in object store 8 on desktop computer 4 that are to be synchronized with instances of the same object in object store 6 on mobile device 3. The identifying data segments are updated each time corresponding object instances have been synchronized.

10

15

20

25

The exact composition of an identifying data segment which is used to identify the particular object instances are assignable by the developer of the desktop synchronization interface component 108, and are then handled and stored by synchronization manager 110. The identifying data segments preferably include some sort of time stamp information which can be compared to determine whether an object has changed since the identifying data segment was last recorded in reference store 112.

In addition to maintaining a plurality of identifying data segments, synchronization manager 110 also maintains a list of object identifiers corresponding to objects maintained in object store 6. These identifiers are provided to synchronization manager 110 whenever a new object is added to object store 6 on mobile device 3.

A brief discussion of the exact protocol by which 30 full synchronization is accomplished is helpful in understanding the context of the present invention. In order to synchronize objects, synchronization manager 110 first creates two lists of handles which

refer to particular objects. The term "handle" refers to a number or other identifier that can be used to uniquely identify an object and to access the object. Generally, a handle is valid for a particular time period or session, such as during the time when an object has been "opened." If the same object is opened again, its handle may be different.

The first list of handles is obtained from reference store 112 and is indicative of objects which have been synchronized in the past and are identified in reference store 112. The second list of handles is a list which identifies the objects stored on object store 8. The two lists of handles are compared against one another to determine whether the same objects are stored in reference store 112 and object store 8.

10

15

20

25

If an object is identified in reference store 112, but not in object store 8, that particular object has been deleted from the desktop 4 since the last synchronization. On the other hand, if an object is identified in object store 8, but it does not appear in reference store 112, then it has been added to the desktop since the last synchronization. In either case, synchronization manager 110 determines how to handle the object. In one preferred embodiment, those objects which have been deleted from desktop object store 8 are also deleted from reference store 112. Further, those which have been added to object store 8 are also added to reference store 112.

30 Synchronization manager 110 then determines whether any of the objects stored in object store 8 have been modified at the desktop since the last synchronization. In other words, if handles

corresponding to the same object appear in both object store 8 and reference store 112, but they are not identical (such as the time stamp, a revision number, or another suitable identifying segment is not the same) that indicates that the object in object store 8 has been modified since the last synchronization.

Synchronization manager 110 then determines whether any objects stored in object store 6 on mobile device 3 have been added or modified since the last 10 synchronization. To determine whether an object has been added to object store 6, synchronization manager 110 compares the list of objects in reference store 112 (which reflects all objects at the last synchronization) with a list of objects on object 15 store 6 maintained by synchronization manager 102. determine whether an existing object modified, synchronization manager 102 is configured to maintain a status bit associated with each object stored in object store 6. The status bit reflects 20 whether the particular object associated with that bit has been changed since the last synchronization. so, synchronization manager 102 notifies synchronization manager 110 of that change if device 3 is then coupled to desktop computer 4, or simply logs 25 the status bit and sends it to synchronization manager 110 the next time device 3 is coupled to desktop computer 4.

It should be noted that none of these procedures require either synchronization manager 110 or synchronization manager 102 to be aware of the particular nature or format of the identifying data segments or of the objects to which they correspond. Rather, interface components 100 and 108 are called

30

upon for all actions that depend upon the actual content of the identifying data segments, and the content of the objects. It is up to the designer of those interfaces to define a format for the identifying data segments that allows the interfaces to perform their required functions.

Once the changes, additions and deletions are determined by synchronization manager 110, the items are synchronized. In order do 10 synchronization manager 110 forms a list of objects which have been changed on either object store 8 or object store 6 and simply calls upon the respective synchronization interface components to update the outdated object. If the same object has been modified both on mobile device 3 and desktop computer 4, a 15 conflict arises. Synchronization manager 110 resolves conflicts by either prompting the user, referencing profile information entered by the user during a set-up procedure which dictates which device the user wants to take precedence over the other, and 20 in which instances.

Where an object has either been created at the desktop computer 4 or in the mobile device 3, that object needs to be exchanged with the other device. In the instance where mobile device 3 needs to obtain a new object from desktop computer 4, synchronization manager 110 calls an interface method known as "Set-Up" which specifies a handle for the object to be obtained from object store 8 in desktop computer 4 and transferred to object store 6 in mobile device 3. Once the handle is obtained, the method known as "GetPacket" is called repeatedly to retrieve a data stream which represents the object, and which is

25

30

formatted by interface component 108. Synchronization manager 110 simply treats the data as a data stream is retrieved and sent over link synchronization manger 102, and eventually to object The appropriate synchronization interface store 6. component 100 parses the data stream in order to identify certain property values associated with properties corresponding to the object. Those properties are then stored in the object store 6.

Finally, synchronization manager 110 updates the identifying data segments associated with either synchronized or exchanged objects and stores the updated data segments in reference store 112.

10

30

The present invention also provides the ability 15 to synchronize electronic attachments to messages. The present invention provides synchronization of objects associated with electronic mail messages as well as other objects maintained by PIMs 5 and 7. Thus, using the above synchronization 20 protocol, objects associated with electronic mail messages are synchronized during the synchronization Synchronization manager 110 detects any new objects object store 8 which in represent electronic mail messages and causes those objects to 25 be transferred to object store 6 on mobile device 3 for attention by the user of mobile device 3.

Further, if the user composes an electronic mail message on mobile device 3 using an appropriate electronic mail messaging application in PIM 5, that electronic mail message is stored as a new object in object store 6. During synchronization, that new object is transferred to desktop computer 4 and object store 8. In the preferred embodiment, a particular

application in PIM 7 undertakes to immediately send that electronic mail message from desktop computer 4 using an appropriate electronic mail messaging transport. Of course, if the electronic mail message cannot be immediately sent, it is stored in object store 8 for later transmission.

Once the message is sent, PIM 7 preferably indicates the message has been sent by placing it in a different location (e.g., from the outbox to the sent items box in an e-mail PIM), or otherwise indicates that the message has been sent such as by updating a status property associated with the object to indicate that the message has been sent. This property may optionally be supported by the PIM 5 on mobile device 3 as well.

10

15

20

25

30

The objects which represent electronic messages typically contain a property which indicates whether an attachment has been attached electronic mail message as it was received at desktop computer 4. Thus, during synchronization, property is transferred to mobile device 3, and eventually object store 6, along with the electronic mail message object which reflects the substance of the electronic mail message. As described above, such attachments can take substantially any form. be text files which represent a document, or they can be other types of files which represent drawings, figures, tables, graphs, etc. Therefore, it may not be desirable for the user of mobile device 3 to have all attachments automatically transferred to object store 6 during synchronization, as the attachments could easily dominate the storage capacity of mobile device 3.

Therefore, the present invention allows the user of mobile device 3 to either select a parameter in the user profile to automatically send all attachments, only some or none. If none are to be automatically, the user can select only attachments which are desired. FIG. 5A illustrates one embodiment of a user interface (UI) 132 used in accordance with the present invention. FIG. 6 is a flow diagram which illustrates the transfer of attachments in accordance with one preferred embodiment of the present invention. The following description will proceed with respect to FIGS. 5, 5A and 6.

10

Recall that mobile device 3 includes an operator 15 input mechanism, such as touch sensitive screen 84 and stylus 86. When the user is viewing electronic mail messages (which are maintained and which are caused to be displayed by PIM 5) the object associated with the mail message typically contains a property which causes a visual indication to be provided to the user which indicates whether any attachments were provided along with the electronic mail message. If the user contacts that visual indication on screen 84, PIM 5 causes the attachment property to be modified in the 25 object associated with the electronic mail message stored in object store 6, and also changes the visual indication provided to the user. This is indicated by block 118.

FIG. 5A illustrates one embodiment of user interface (UI) 132 which reflects this visual indication. UI 132 is preferably displayed on screen 84. Command bar 134 preferably includes a plurality of commands actuable by the user, and labeled A-E in

In a preferred embodiment, the commands FIG. 5A. include an add-file command which allows the user to file to be downloaded during the next synchronization. The tool bar also preferably includes an open file command which allows the user to open any files then displayed by UI 132. Command bar 134 also preferably includes a copy file command which allows the user to specify a name and file to be copied from the mail store to a new location. Command 10 bar 134 also preferably includes a move file command which allows the user to specify a location or name, and a file, which is then moved from the mail store to the new location. A confirmation dialog is then preferably displayed before the moving task 15 completed. Command bar 134 also preferably includes a delete command which allows the user to select a file to be deleted. In each case, in accordance with one preferred embodiment of the present invention, the user selects any of the commands by simply contacting 20 screen 84 with stylus 86.

Attachment indicator field 136 indicates the presence of an attachment to any electronic mail message displayed under file name field 138.

Preferably, items displayed in attachment field 136 indicate whether the attachment is scheduled to be downloaded at the next synchronization.

25

30

File name field 138 preferably displays the file name in at least two different formats. When displayed in a first format, such as in italics, that indicates that the attachment to that particular message is not local to mobile device 3. When displayed in block text, for example, that indicates that the attachment has been downloaded, and is

-25-

resident on mobile device 3.

10

25

30

The size field 140 indicates the size of the attachment. If the attachment is resident on mobile device 3, the size field shows the size of the document. If the attachment is not resident on mobile device 3, the size field shows that no current memory is consumed by the attachment, and also shows the size of the attachment.

Where an attachment has not been chosen to be downloaded, but where the user of mobile device 3 wishes to have the attachment downloaded during the next synchronization, the user simply contacts screen 84 (or double taps a designated portion of the screen) 84 with stylus 86 over the file name field 138, or the attachment field 136. This causes the attachment indicator displayed in attachment indicator field 136 to change appearance formats to indicate that the attachment has now been selected for downloading during synchronization. Thus, UI 132 provides a very efficient mechanism by which a user can dynamically select certain attachments to be downloaded during a next synchronization.

During the next synchronization, synchronization manager 110, in accordance with synchronization protocol discussed above, detects a change in the object associated with the particular electronic mail message which has been modified by the user. The change is due to the fact that the attachment property was modified by the user when the user contacted screen 84, and a new time stamp or revision number was then associated with that object when PIM 5 stored the modified object in object store 6. This causes synchronization manger 102 to set the status bit

associated with that object and communicate that status bit to synchronization manager 110 during synchronization. This is indicated by block 120.

Synchronization manager 110 then calls the particular interface methods in component 108 synchronize the particular object for which the attachment property was modified by the However, rather than simply updating the object in object store 8, synchronization interface component 10 108 determines whether the particular object which has been modified is an electronic mail message with an attachment property. If so, synchronization interface component 108 determines whether it is the attachment property which has been modified to request 15 attachment. This is done by parsing the data stream received from mobile device 3 into the various property values associated with the object. If it is not the attachment property which has been modified, then synchronization interface component 108 simply 20 continues with the normal synchronization protocol and updates the object in object store 8. This is indicated by blocks 122 and 124.

If, however, synchronization interface component 108 determines that it is the attachments property 25 which has been modified by the user, synchronization interface component 108 can optionally check the registry maintained by the operating system in desktop computer 4 to determine whether the particular user of mobile device 3 has indicated in user profile 30 information any specific actions to be taken sending attachments. For example, during initialization proceeding at desktop 4, the user can set profile parameters which indicate that a specific

file converter is to be invoked to convert any attachment to be transferred to mobile device 3 into a format that is understandable by the device. This is indicated by block 126.

5

10

15

20

25

30

After determining that an attachment is to be transferred to mobile device 3, and after optionally checking profile information associated with the user mobile device 3, synchronization component 108 calls the necessary interface methods associated with RAPI component 114 to transfer the attachment to RAPI server 116 and eventually object store 6. This is indicated by block 128. Again, the particular interfaces, methods and interaction of RAPI component 114 and RAPI server 116 are preferably implemented in accordance with a well known publicly documented specification commercially available from the Microsoft Corporation.

After the transfer is completed, synchronization manager 110 updates reference store 112 to contain the appropriate identifying information associated with the object representing the electronic mail message which was modified by the user. This is indicated by block 130.

Another problem can also exist when synchronizing electronic mail messages stored in the in-box of mobile device 3 with those stored in the in-box of desktop computer 4. For example, mobile device 3 can potentially be coupleable to more than one desktop computer 4. If the user of mobile device 3 has a desktop computer at home, and a desktop computer at work, for instance, mobile device 3 will likely be periodically coupled to both of those computers. If the objects from the in-boxes of both of those desktop

computers are automatically synchronized with the objects in the in-box on mobile device 3, the result will be that eventually both desktop computers, mobile device 3 will all have all of the messages in the in-boxes of both of the desktop computers. other words, if the user of mobile device 3 connects the device to the home desktop computer, the home desktop computer will synchronize the in-boxes such that the in-box of mobile device 3 contains all 10 objects in the in-box of the home desktop computer. Then, when the user connects mobile device 3 to the desktop computer at work, the desktop computer at work will recognize that a number of objects have been added to object store 6 (all of the electronic mail 15 messages in the in-box from the personal computer at home) and will add those objects to the in-box of the desktop computer at work, in object store 8. Thus, all of the electronic mail messages in the in-box of the home computer will be copied to the desktop 20 computer at work. The same is true for all of the electronic mail messages received at work (i.e., they will be copied to the in-box of the desktop computer Similarly, mobile device 3 will contain all at home). messages from the in-boxes of both desktop computers. Therefore, the present invention provides a number of 25 individualized filtering options to prevent unwanted duplication and proliferation of electronic

Recall that synchronization manager 110 is configured to generate a list which identifies new objects that have been added to object store 6 on mobile device 3. In one preferred embodiment, synchronization manager 110 is also configured to

messages.

30

determine whether those new objects are contained in the in-box of mobile device 3. If so, that means that mobile device 3 has an electronic mail message in its in-box where no corresponding mail message is in the in-box of desktop computer 4 (because the object associated with the message in the in-box of mobile device 3 does not correspond to an object in object store 8 on desktop computer 4). If that is the case, synchronization manager 110 simply does synchronize that object, and hence does not copy the mail message from the in-box of mobile device 3 to the desktop computer 4.

10

preferred In another embodiment, the synchronization of mail messages from the in-box of mobile device 3 is filtered based upon the specific transport used to receive the electronic mail message. In other words, mobile device 3, in accordance with one aspect of the present invention, is provided with a plurality of transports 132, 134, and 136. 20 transports may include, for instance, POP3 transport, a Skytel paging transport, or any other commercially available transport. Such transports are typically supported by different applications in PIM 5.

25 Electronic mail objects associated with electronic mail messages received through transports typically contain a property, or tag, which specifically identifies the particular transport the electronic through which mail message 30 received. In . one preferred embodiment, synchronization manager 110 is configured to not only create a list of new objects on mobile device 3, but also to examine those objects to determine whether

they are electronic mail messages, and, if so, which transport they were received on. If that transport does not correspond to the transport then being used by desktop computer 4 (or any other set of transports specified by the user in profile information stored in the registry maintained by the operating system of desktop computer 4) synchronization manager 110 simply does not synchronize that particular object. Therefore, if the user of mobile device 3 receives

Therefore, if the user of mobile device 3 receives personal electronic mail transmissions by one type of transport and receives business or professional electronic mail messages by another type of transport, a particular type of transport can be used to filter synchronization of those messages. Of course, the filtering function can also be carried out by synchronization interface component 108, rather than by synchronization manager 110.

15

Even when the above filtering techniques are employed, the user can elect to manually transfer any 20 electronic mail messages from desktop computer 4 to mobile device 3. A suitable user interface is simply provided on desktop computer 4 which allows the user to identify those specific electronic mail messages in the in-box of desktop computer 4 or in the in-box of 25 mobile device 3 which the user wishes to transfer. Those objects will then transferred be synchronized using normal the synchronization As one example, one such user interface is protocol. that shown in FIG. 5A, and another suitable interface 30 is that referred to as a "drag and drop" interface.

Further, another problem can present itself in composing and sending electronic mail messages from mobile device 3. In order to send electronic mail

-31-

messages, one must typically fully qualify the address of the recipient, or the mail server sending the message will be inadequately informed of the address and will be unable to deliver the message. However, it is also common for users of electronic mail applications to identify familiar names for particular parties to which they send a significant number of electronic mail messages. The familiar name is tagged to the fully qualified address which is then used by the electronic mail system in addressing the message.

is common, however, for individuals with desktop computers who work in a large corporation or organization to have a full address book which contains the fully qualified electronic mail address 15 for all persons in the corporation or organization. This can potentially consume an enormous volume of To retain such a voluminous address book on memory. mobile device 3 is undesirable. Many users may also retain a greatly abridged address book or contact 20 directory which contains the full name and fully qualified address of certain individuals to whom they send a significant number of electronic mail messages. Such an abridged directory is commonly stored in object store 6 on mobile device 3.

Where the fully qualified address does not appear in the abridged directory, synchronization interface component 108 uses MAPI methods to resolve the address. In other words, MAPI supports a feature by which name fields in various directories can be searched in a predetermined order in order to find an electronic mail address based on a familiar name. Thus, when an object representing an electronic mail transmission to be sent is transferred to desktop

computer 4, the same name resolution hierarchy is used by desktop computer 4 in resolving the name and obtaining the fully qualified electronic mail address as if the user had composed the message and sent the message from desktop computer 4. This significantly alleviates the necessity of storing an entire, and potentially voluminous, address book on mobile device 3. Thus, this reduces the necessary storage capacity of mobile device 3.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

15

10

#### WHAT IS CLAIMED IS:

A method of transferring objects, comprising: providing a first computer including a first application program configured maintain electronic mail objects, electronic mail object corresponding to each electronic mail message received by the first computer, the first computer being configured to maintain attachments associated with the electronic messages, and the first computer including a first object store configured to store the electronic mail objects;

providing a mobile device, coupleable to the first computer, including a second object store, second application a program configured to maintain in the second object store a second electronic mail object corresponding to each electronic mail object synchronized to the mobile device, the second application program being configured to receive the attachments associated with the electronic mail objects synchronized to the mobile device from the first computer; and

when the mobile device is next coupled to the first computer, transferring to the mobile device the attachments associated with the electronic mail objects synchronized to the mobile device.

2. The method of claim 1 wherein transferring to the

mobile device the attachments comprises:

transferring all attachments associated with any of the electronic mail objects synchronized to the mobile device.

3. The method of claim 1 wherein providing a mobile device comprises:

providing the second application program configured to maintain in the second object store a second electronic mail object corresponding to each electronic mail object synchronized to the mobile device wherein the second electronic mail object includes a property having a value indicative of whether the electronic mail message represented bv the second electronic mail object includes attachment.

4. The method of claim 3 wherein transferring to the mobile device the attachments comprises:

transferring preselected attachments to the mobile device.

5. The method of claim 4 wherein transferring preselected attachments comprises:

detecting an alteration in the second electronic mail object indicative of an attachment request; and

when the mobile device is next coupled to the first computer, transferring the attachment to the mobile device based on the attachment request.

6. The method of claim 5 wherein the first application program includes first application program interfaces, wherein the second application program includes second application program interfaces, and wherein transferring the attachment comprises:

communicating with the first application program through the first application program interfaces to retrieve the attachment from the first object store; and

communicating with the second application program through the second application program interfaces to deliver the attachment to the second object store.

7. The method of claim 6 wherein providing the first computer includes providing a synchronization component configured to communicate with the first and second application programs through the first and second application program interfaces, respectively, and wherein detecting an alteration comprises:

detecting the alteration in the second electronic mail object with the synchronization component.

- 8. The method of claim 7 wherein communicating with the first application program through the first application program interfaces is performed with the synchronization component.
- 9. The method of claim 7 wherein communicating with the second application program through the second application program interfaces is performed with the

synchronization component.

- 10. The method of claim 1 and further comprising:

  before transferring the attachment to the mobile

  device, accessing, at the first computer,

  transmission parameters associated with

  the mobile device; and
  - transferring the attachment according to the transmission parameters accessed.
- 11. The method of claim 10 wherein transferring the attachment according to the transmission parameters includes:
  - retrieving conversion parameters indicative of a desired file conversion to be performed on the attachment; and
  - performing the desired file conversion on the attachment.
- 12. A mobile device couplable to a first computer, the first computer including a first application program configured to maintain electronic objects, one electronic mail object corresponding to each electronic mail message received by the first computer, a first object store configured to store the synchronization electronic mail objects, and а component configured to synchronize the electronic mail objects from the first object store with objects from a second object store, the mobile device comprising:
  - a second object store; and
  - a second application program configured to maintain a second electronic mail

-WO 99/22322 PCT/US98/22384

object corresponding to each electronic mail object synchronized to the mobile device, in the second object store, the second application program being configured to receive and store attachments associated with second electronic mail objects synchronized to the mobile device.

- 13. The mobile device of claim 12 and further comprising:
  - a user interface providing attachment indicia indicative of whether the electronic mail message represented by the second electronic mail object includes an associated attachment; and
  - a user input device providing a user input signal indicative of a command by the user to receive the attachment, the user input signal altering a property associated with the second electronic mail object.
- 14. The mobile device of claim 13 wherein the first application program includes first application program interfaces and the second application program includes second application program interfaces, and wherein the mobile device is configured to provide the second electronic mail object to the first computer such that the synchronization component recognizes that the property has been altered and communicates with the first application program through the first

- WO 99/22322 PCT/US98/22384

-38-

application program interfaces to retrieve the attachment from the first object store and communicating with the second application program through the second application program interfaces to deliver the attachment to the second object store.

15. A method of transferring data from a first object store to a second object store, comprising:

providing a first computer including a first application program configured to maintain electronic mail objects, one electronic mail object corresponding to each electronic mail message received by the first computer, the first computer including a first object store configured to store the electronic mail objects;

providing a mobile device, coupleable to the first computer, including a second object store, a second application program configured to maintain in the second object store a second electronic mail object corresponding to each electronic mail object synchronized to the mobile device;

when the mobile device is next coupled to the first computer, synchronizing with the mobile device the electronic mail objects from the first computer;

prior to synchronizing, accessing a set of user defined filter parameters; and

synchronizing the electronic mail objects according to the filter parameters.

The method of claim 15 wherein synchronizing according to the filter parameters includes:

creating the second electronic mail object to provide only a user specified number of of text associated with the electronic mail message.

17. The method of claim 15 wherein synchronizing according to filter parameters comprises:

synchronizing the electronic mail objects according to a transport type used to transport the electronic mail message and identified in the first electronic mail object.

18A mobile device coupleable to a first computer, the first computer including a first application program configured to maintain electronic mail objects, one electronic mail object corresponding to each electronic mail message received by the first computer, a first object store configured to store the electronic mail objects, and synchronization a component configured to synchronize the electronic mail objects from the first object store with objects from a second object store, the mobile device comprising:

- a second object store;
- second application program configured maintain a second electronic mail object corresponding to each electronic mail object synchronized to the mobile device, in the second object store; and
- a plurality of electronic mail transports, each

. WO 99/22322 PCT/US98/22384

electronic mail transport being suitable for transmitting electronic mail messages.

- 19. A computer system, comprising:
  - a first computer including:
    - a first application program, having first application program interfaces, configured to maintain electronic mail objects, one electronic mail object corresponding to each electronic mail message received by the first computer;
    - a first object store configured to store the electronic mail objects; and
    - a synchronization component configured to synchronize the electronic mail objects from the first object store with objects from a second object store;
  - a mobile device, coupleable to the first computer, including:
    - a second object store;
    - a second application program, having second application program interfaces, configured to maintain a second electronic mail object corresponding to each electronic mail object, synchronized to the mobile device, in the second object store;
    - a user interface providing attachment indicia indicative of whether the electronic mail message represented

. WO 99/22322 PCT/US98/22384

-41-

by the second electronic mail object includes an associated attachment;

a user input device providing a user input signal indicative of a command by the user to receive the attachment, the user input signal altering a property associated with the second electronic mail object; and

the synchronization component being configured to recognize that the property has been altered and communicate with the first application program through the first application program interfaces to retrieve the attachment from the first object store and communicate with the second application program through the second application program interfaces to deliver the attachment to the second object store.

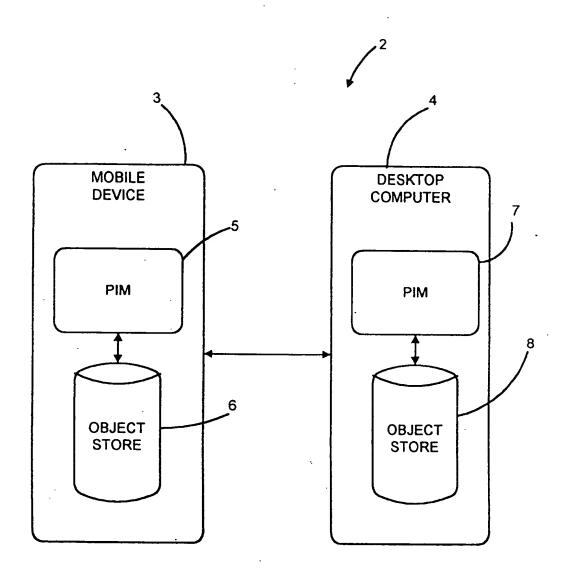
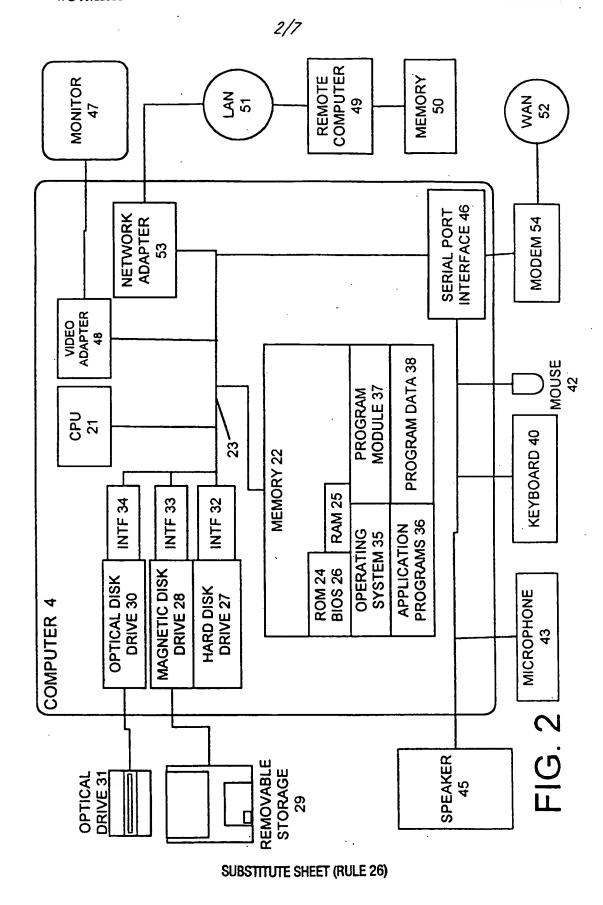
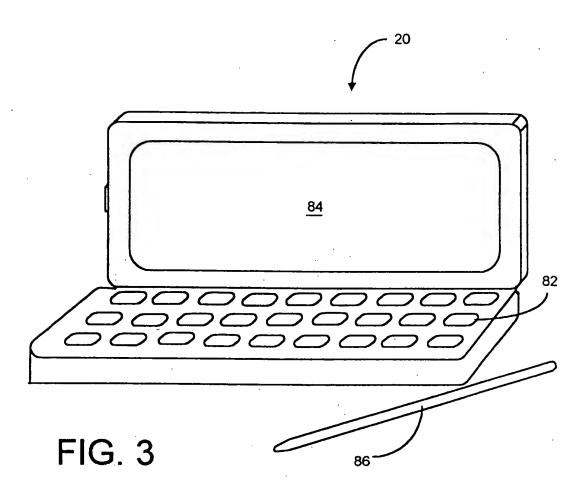


FIG. 1

SUBSTITUTE SHEET (RULE 26)

 $e_{\tau} \in \mathcal{C}$ 







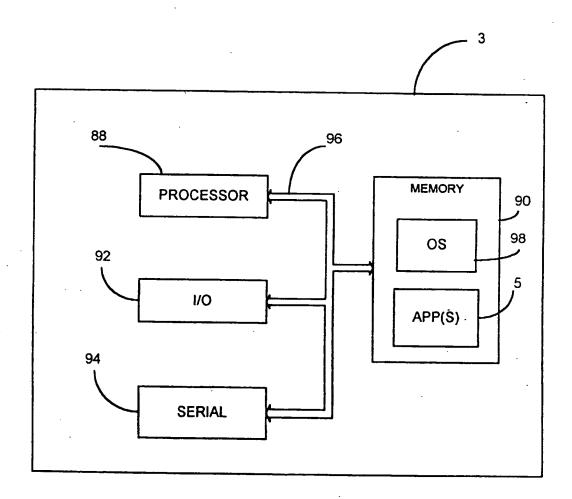


FIG.4


SUBSTITUTE SHEET (RULE 26)

 $\varphi : \mathcal{O} \to$ 

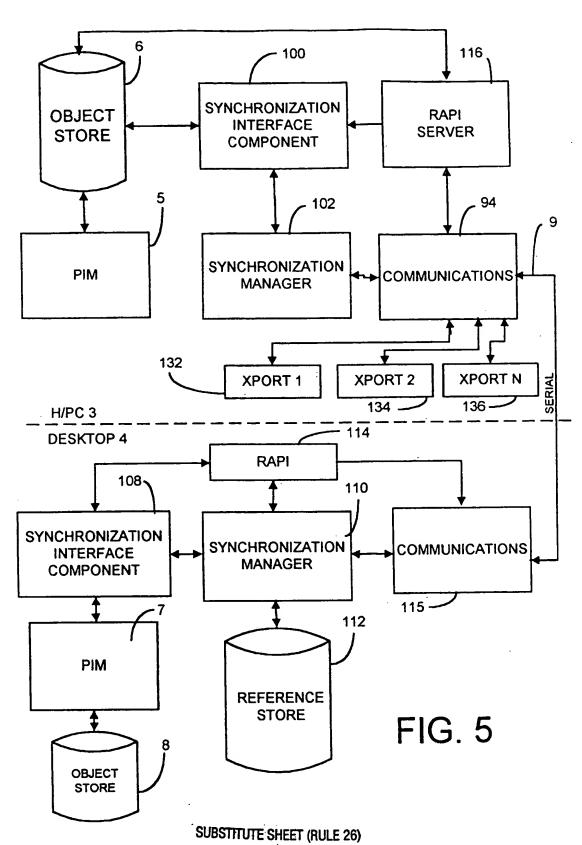

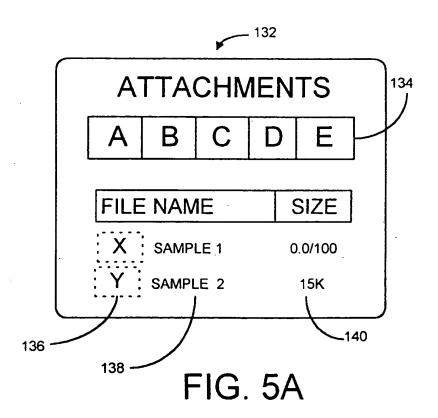

SUBSTITUTE SHEET (PHILE 26)

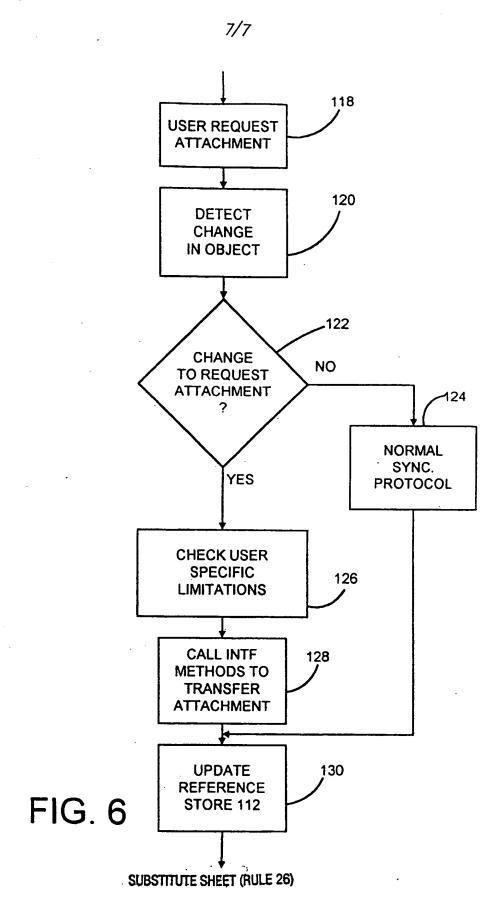

### INTERNATIONAL SEARCH REPORT

tnt. tional Application No PCT/US 98/22384

TA CLASS	PERSON OF CURLETTER								
IPC 6	IFICATION OF SUBJECT MATTER G06F17/60 G06F15/02								
According to International Patent Classification (IPC) or to both national classification and IPC									
B. FIELDS SEARCHED									
Minimum d IPC 6	ocumentation searched (classification system followed by classification G06F H04L	tion symbols)							
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched									
Electronic o	data base consulted during the international search (name of data b	ase and, where practical, search terms used	)						
	*		·						
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT								
Category *	Citation of document, with Indication, where appropriate, of the re	olevant passages	Relevant to claim No.						
Y	ANONYMOUS: "Method for Personal Digital Assistance Calendar Export Nomenclature" IBM TECHNICAL DISCLOSURE BULLETIN, vol. 37, no. 3, March 1994, pages 481-482, XP000441550		1-19						
	New York, US see the whole document								
Υ	US 5 664 228 A (MITAL AMIT) 2 September 1997 see abstract; claims 1-14; figur see column 1, line 14 - column 9	1-19							
		-/	•						
X Furth	ner documents are listed in the continuation of box C.	X Patent family members are listed	in annex.						
* Special ca	tegories of cited documents:	"T" later document published after the inter	mational filing date						
"A" document defining the general state of the art which is not considered to be of particular relevance or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention.									
"E" earlier document but published on or after the international filling date "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered in									
1.* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the									
"O" docume other n	ent referring to an oral disclosure, usa, exhibition or neans	document is combined with one or more ments, such combination being obviou	re other such docu-						
"P" docume later th	nt published prior to the international filling date but an the priority date claimed	in the art. "&" document member of the same patent for	,						
Date of the a	actual completion of the international search	Date of mailing of the international sea	rch report						
3	February 1999	19/02/1999							
Name and m	nailing address of the ISA European Patent Office, P.B. 5818 Patentiaan 2	Authorized officer							
	NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nt. Ear. (-31-70) 340-2016	Gardiner A							

### INTERNATIONAL SEARCH REPORT

Int .ilenal Application No PCT/US 98/22384

		FC1/U3 96/22364
C.(Continua Category *	ation) OCCUMENTS CONSIDERED TO BE RELEVANT  Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Category	Citation of account with interesting a physicisms, or the research bassardes	neevan to clam No.
A	PEPPER D J ET AL: "The CallManager system: a platform for intelligent telecommunications services" SPEECH COMMUNICATION, OCT. 1997, ELSEVIER, NETHERLANDS, vol. 23, no. 1-2, pages 129-139, XP004117214 ISSN 0167-6393 see abstract see page 130, column 2, paragraph 3 - page 132, column 1, paragraph 3	1-19
A	WO 97 23853 A (PHILIPS ELECTRONICS NV; PHILIPS NORDEN AB (SE)) 3 July 1997 see abstract; claims 1-15; figures 1-14 see page 1, line 11 - page 3, line 13	1-19
A	O'CONNOR K ET AL: "Managing contacts in Windows 95 GoldMine for Windows 95" PC USER, 3-16 APRIL 1996, EMAP COMPUTING, UK, no. 280, page 79 XP002092137 ISSN 0263-5720 see page 79, column 2, paragraph 5 - column 3, paragraph 6	1-19
A	HULAK J: "In defense of the personal digital assistant" BUSINESS COMMUNICATIONS REVIEW, OCT. 1995, USA, vol. 25, no. 10, pages 45-48, XP002092138 ISSN 0162-3885 see page 48, column 1, paragraph 2	1~19
A	WO 94 15294 A (SUREFIND CORP ;LALONDE JAMES E (US); RUFF RITCHEY A (US)) 7 July 1994 see page 1, line 27 - page 4, line 17	- 1-19

1

#### INTERNATIONAL SEARCH REPORT

information on patent family members

In dional Application No PCT/US 98/22384

Patent document cited in search report		Publication date	date member(s)		Publication date
US 5664228 A 02-09		02-09-1997			
WO 9723853	Α	03-07-1997	EP	0811216 A	10-12-1997
WO 9415294	A	07-07-1994	US	5283731 A	01-02-1994
			AU	4405093 A	24-10-1994
			AU	6015594 A	19-07-1994
			WO	9423383 A	13-10-1994
			AU	4405393 A	19-07-1994
			WO	9415428 A	07-07-1994

Form PCT/ISA/210 (patent family annex) (July 1992)

# This Page Is Inserted by IFW Operations and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

### BLACK BORDERS

- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.